


THERMOMASS®

Building Insulation Systems

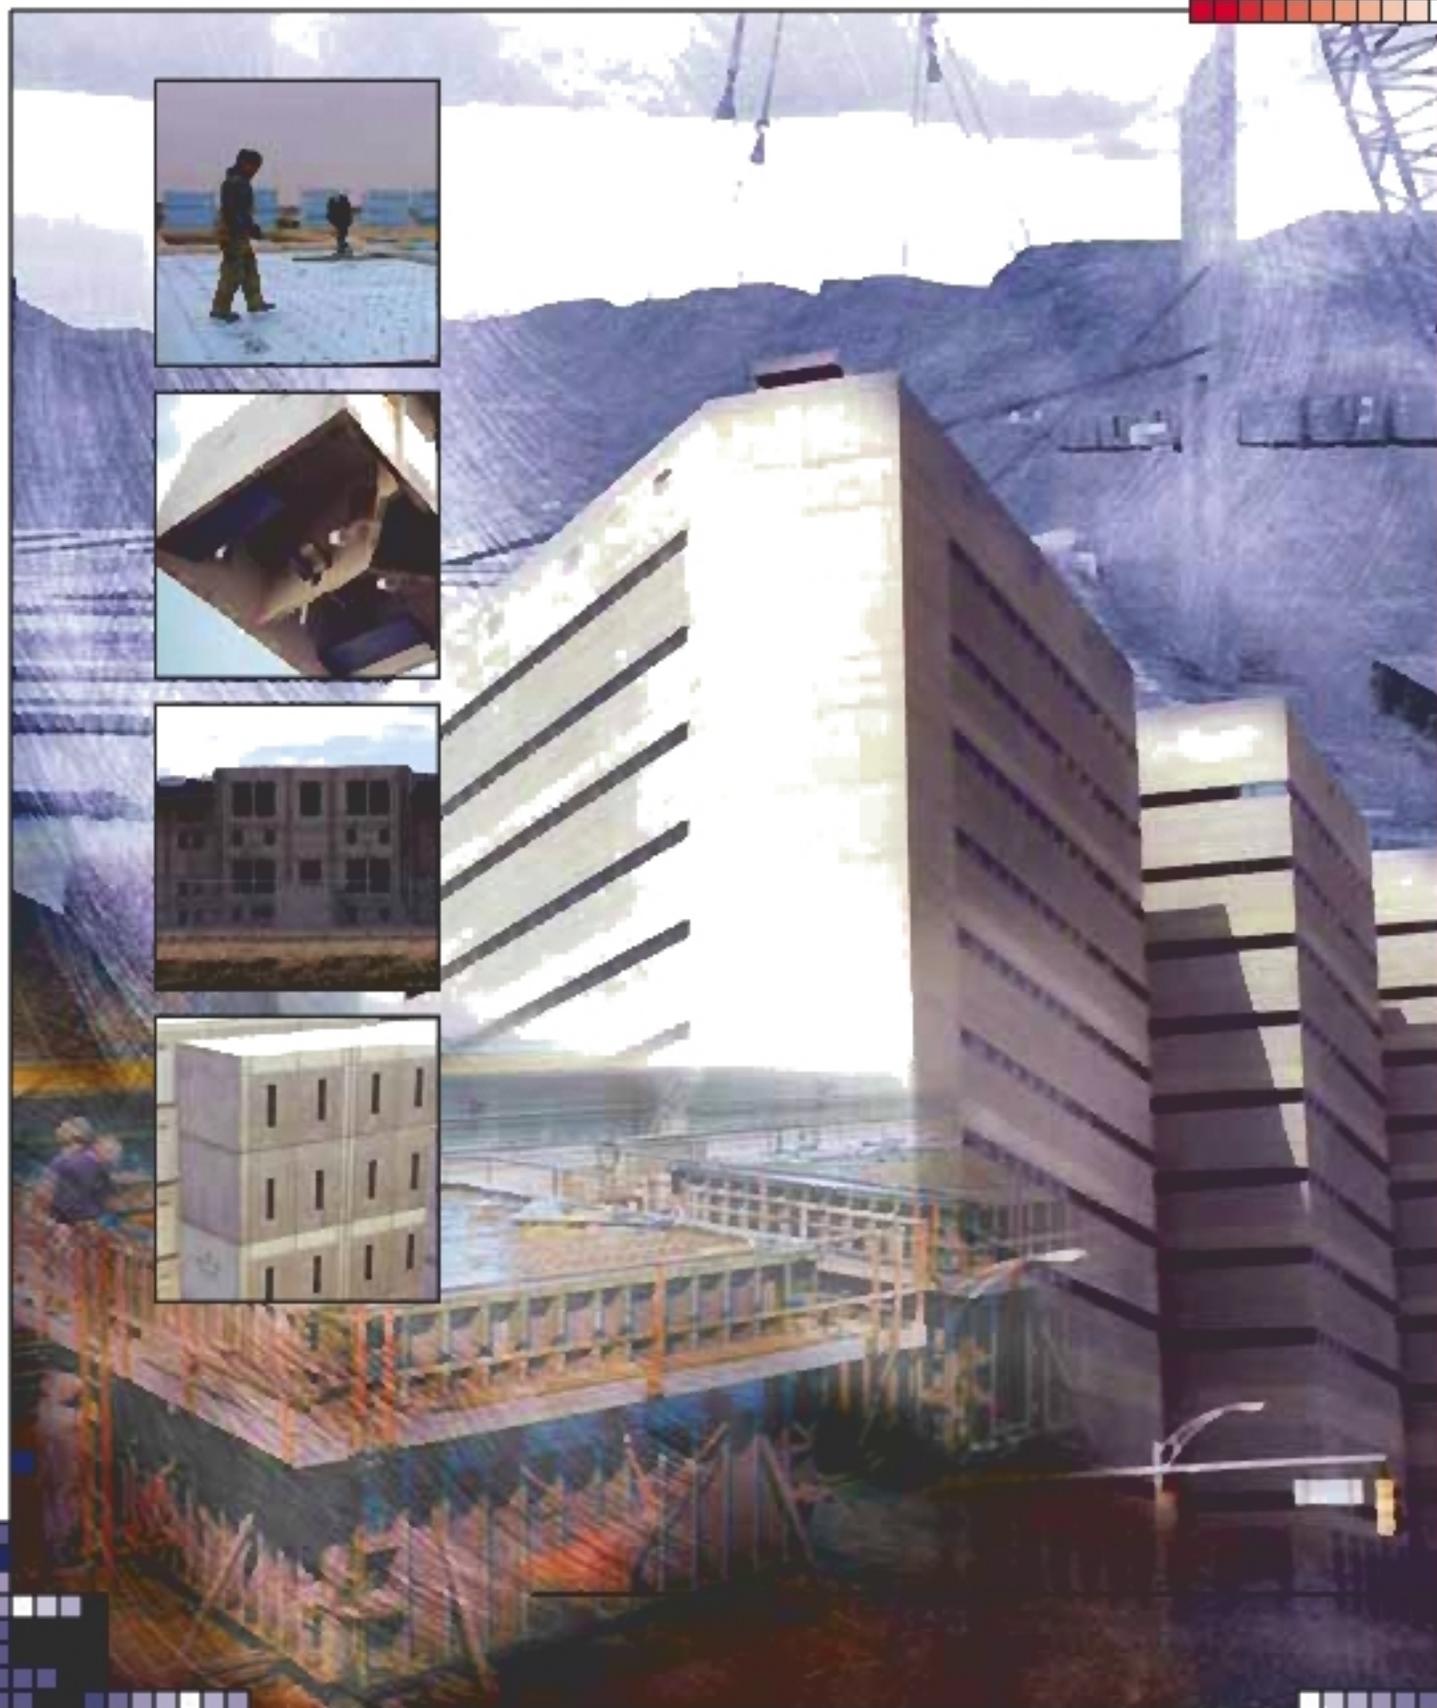

CORRECTIONAL

THERMOMASS®

THE SYSTEM



Composite Technologies Corporation (CTC) was founded in 1980 by Robert T. Long. His innovative thinking and vision led to the development of the THERMOMASS® Building Insulation System. At the heart of the THERMOMASS® system is a patented continuous fiber composite connector, which is used to structurally tie two layers of concrete together through predrilled, prefabricated, extruded Dow brand insulation products. The non-conductive, chemically resistant, fiber composite connector allows the creation of an uninterrupted envelope of insulation throughout the exterior walls of the building. This creates a highly energy efficient building system that is virtually maintenance-free and has the ability to not only resist mold, but stand up to fire, earthquakes, hurricanes and tornadoes as well.



The continued development of this system represents a dramatic advancement in building technology for many types of temperature and atmosphere controlled facilities throughout the world and offers unsurpassed advantages over block/brick, steel and insulated metal panel construction.

A HISTORY OF SUCCESS



For over 20 years, THERMOMASS® has been the industry leading system for concrete sandwich wall construction. Extensive testing, research and development of innovative technologies keeps CTC at the forefront. With a track record of over 100,000,000-sq. ft. of sandwich walls in the US and around the world in use today, we have more experience than all other building insulation systems combined.

The energy efficiency of the finished building combined with the ease and speed of construction has made our building system the preference of industries ranging from education and correctional facilities to freezers, coolers, distribution centers and retail facilities. They keep returning to the THERMOMASS® Building Insulation System because it provides them with unparalleled construction quality, aesthetic versatility and energy savings.





A FAMILY OF COMPONENTS



The THERMOMASS® Building System is a technologically advanced system that delivers exceptional construction with superior insulation effectiveness.

Connectors

Our family of continuous fiber composite connectors is made from a resilient composite matrix and possesses incredible strength and durability. They are far superior to steel and or plastic connectors in sandwich wall panels because they are non-corrosive, chemically resistant and have low thermal conductivity with unsurpassed structural strength.

Insulation:

Dow brand insulation products are a "closed cell" structure, that means no gaps or voids between cells. The rigid board construction resists all forms of water penetration including water vapor transmission. The high thermal resistance and high compressive strength make it a valuable component in the THERMOMASS® Building System.

Dow insulation used in the THERMOMASS® Building System:

Styrofoam® Brand Extruded Polystyrene

ISOCAST R Polyisocyanurate




ProPEL® Extruded Polypropylene



THERMOMASS®

 BUILDING INSULATION SYSTEM

The ability of concrete to store energy and dampen the effect of temperature change on heating and cooling systems is known as the “**Thermal Mass Effect.**” Due to the mass effect created by the THERMOMASS® Building Insulation System, the performance R-value of the system can be two to three times greater than that of the material R-value. No other concrete system can come close.

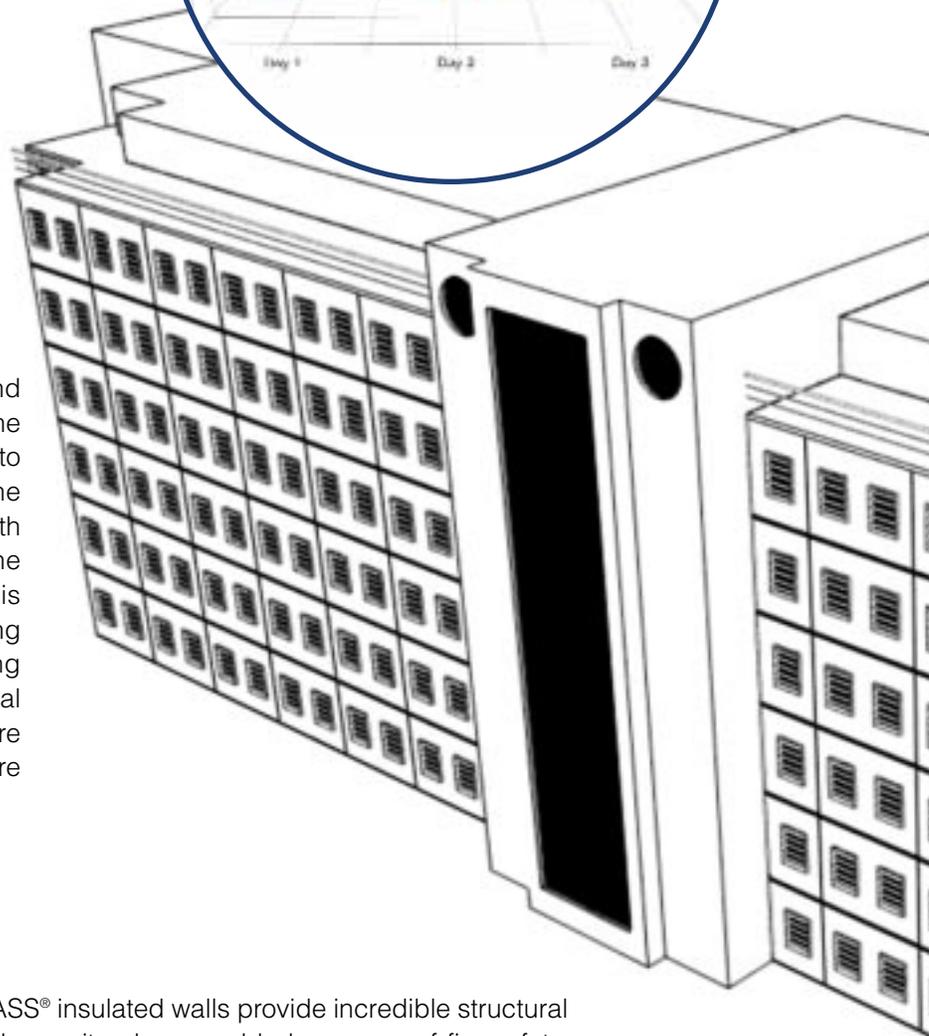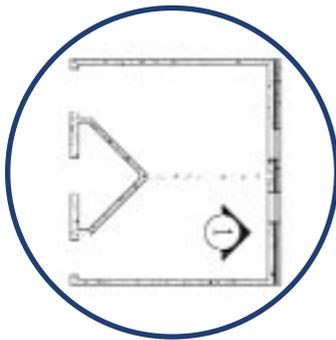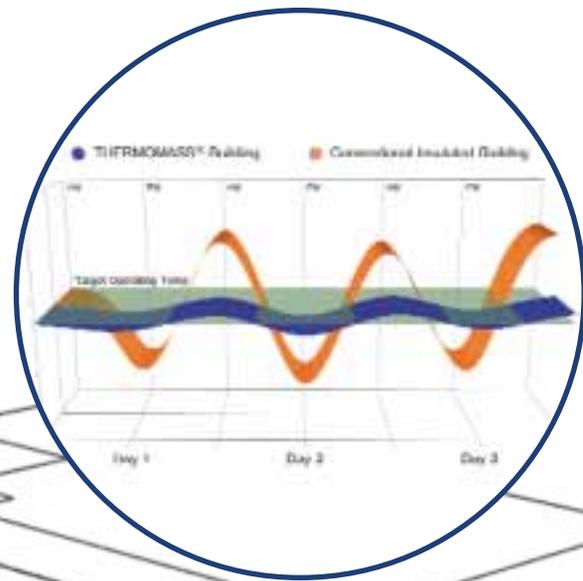


THERMOMASS® uses edge to edge and opening to opening insulation, enabling the exterior and interior wythes of concrete to behave independently. This allows the exterior wythe to expand and contract with exterior temperature change while the interior wythe remains constant. This eliminates the chance of thermal cracking and thermal bowing. Unlike competing systems, THERMOMASS® eliminates thermal short circuits, air infiltration and moisture drive through the exterior walls. No moisture means no mold or mildew.



THERMOMASS® insulated walls provide incredible structural integrity and security plus an added measure of fire safety. Our connectors have been tested by a leading United States fire testing agency where a panel constructed with THERMOMASS® fiber composite connectors was subjected to 1093 °C (2000 °F) for four hours with no degradation. The temperature of the surface of the wall opposite the fire rose only 20.8 °C (37.6 °F) during the testing period. The standard for passing this test was 121 °C (250 °F).


CORRECTIONAL

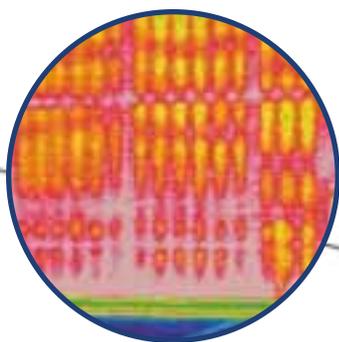

Through the science of thermographic imaging we are able to prove the benefits of the THERMOMASS® system. The blue color in the upper left image of a THERMOMASS® facility shows zero thermal bridging and no energy loss. Lower left is a thermal image of a traditional system. The red and yellow colors indicate severe thermal bridging and massive energy loss.




Your maintenance department will have appreciation for the durability of insulated concrete and the rugged interior and exterior finishes. Whether you need a minimum, medium or maximum security facility, THERMOMASS® insulated concrete sandwich walls provide the strength and durability needed while not compromising thermal performance.

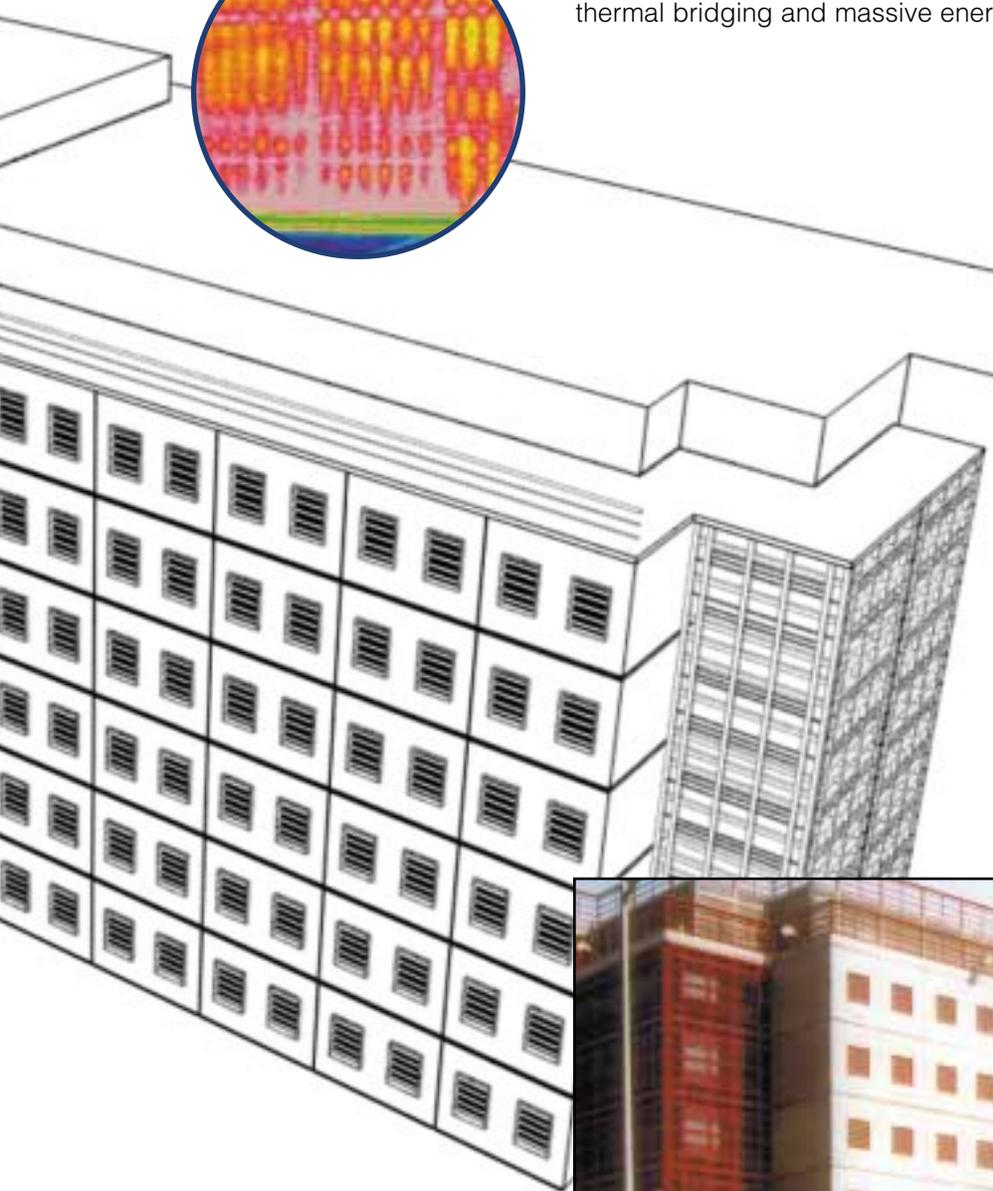

CORRECTIONAL



THERMOMASS®

 BUILDING INSULATION SYSTEM

A SOUND INVESTMENT

-  Building a better facility doesn't always cost more. Concrete is low in cost and one of the most durable and flexible construction materials available. Couple that with the added features and benefits of the THERMOMASS® Building Insulation System, and you surely will not "break the bank" on the project. In fact, its a common misconception that other construction methods are less expensive than using insulated concrete. To build a high performance correctional facility, there is no more economical way than concrete sandwich wall construction and the THERMOMASS® Building Insulation System.

MEETING THE SCHEDULE

-  Correctional facilities built with insulated concrete sandwich walls utilizing the THERMOMASS® Building Insulation System are able to meet the most aggressive project schedule. Whether the project is modular precast, tilt-up, precast, or poured-in-place THERMOMASS® is the overwhelming choice of prison officials and designers world-wide. By sandwiching the insulation between the two layers of concrete, the facility's walls are built and insulated in one operation, greatly reducing construction time and getting the project finished on schedule.

THE HEALTHY CHOICE

-  Health experts know that mold and mildew is a serious problem in correctional facilities and have been identified as health hazards. These organisms thrive in moist areas caused by temperature fluctuations usually located near places where the outside climate influences the interior walls. The THERMOMASS® System keeps the outside climate outside. With the THERMOMASS® System there is no moisture accumulation. No moisture means no mold or mildew which means no problems!

LEED™ -ING THE WAY IN GREEN BUILDING

-  The THERMOMASS® Building Insulation System can make a significant contribution toward the construction of a Green Building. Through its highly energy efficient and thermally efficient properties, THERMOMASS® aids architects and engineers in achieving points toward LEED™ certification. LEED™ is a point system used to quantify the use of "green" building materials, designs and products. This rating system contains several sections and subsections in which points are allocated toward LEED™ certification of a building. Builders using the THERMOMASS® system can earn up to 21 points in five of the six sections of LEED™.

CORRECTIONAL





TECHNICAL DESIGN ASSISTANCE

- Determination of system compatibility with your project
- Recommendation of design modifications to assure the integrity of the project
- CAD generated panel layouts that simplify and speed up the construction process
- CAD generated panel and joint design and construction details

CONSTRUCTION ASSISTANCE

- Pre-Construction meetings
- On site installation training and assistance
- Ongoing project consultation

ANALYSIS SOFTWARE APPLICATION TOOLS

With our State-of-the-art analysis application suite, we can produce studies and testing on the transfer of moisture, heat migration and humidity levels on panel wall systems. By using these software applications, we can accurately predict reactions to weather from both external and internal climate conditions. Our analysis application suite includes:

- Isothermal analysis
- Mass Performance analysis
- Energy Efficiency and Cost Reduction analysis
- Construction Cost Estimates and Building Life Cycle Payback analysis
- Dewpoint analysis, Moisture and WUFI
- Thermographic analysis
- Finite Element analysis

CORRECTIONAL





THERMOMASS⁺

Building Insulation Systems



Composite Global Solutions
Australasia & Middle East Distributors

6A Monomeath Ave, Toorak, Vic 3142, Australia

Telephone + 61 3 9824 8211

Facsimile + 61 3 9824 8611

Email info@compositeglobal.com

Website compositeglobal.com